

## Product data sheet




### Information

|             |   |
|-------------|---|
| Designation | ERGOSOFT straight grab bar, 300 mm, White Polyalu, tube Ø 33 mm |
| Reference   | 046135  |

### Product advantages

- + Non-slip and anti rotation grab bar.
- + Concealed fixings.
- + Corrosion resistant warranty.

### Description

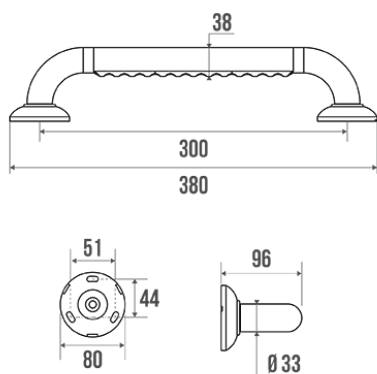

Ergonomic grab bar.  
Composite material: White synthetic resin + aluminium profile + taupe ergonomic notch.  
Tube Ø 33 mm.  
White flange border and central body.  
Non-slip and anti-rotation for the hand.

Stainless steel fixing screws included.

### Technical characteristics

|                         |   |
|-------------------------|---|
| Color                   | White                                       |
| Dimensions              | 300 mm                                      |
| Material                | Polyalu                                     |
| Gross weight            | 0.581 kg                                    |
| Packaging               | Plastic protection bag + Hanger for display |
| Maximum Weight Capacity | 150 kg                                      |
| Laboratory tests        | 225 kg                                      |
| Made in France          | yes   |
| Maintenance             | yes   |
| Guarantee               | 10 years                                    |

|                 |   |
|-----------------|---|
| Gencod          | 3563390461358   |
| Custom code     | 7615200000  |
| Technical sheet | <a href="#">A55035800_IND_06</a>  |
| Spare parts     | Ref. 046100, Polyalu cover plate. Ref. 046101, Bag of 3 stainless steel screws. Ref. 046288, Flange, cover plate and fixings. |

## Fixing and maintenance advices

---

Recommended height for the horizontal part : 800 mm from the ground. Grab bars provide support and added safety if properly fitted in accordance with our technical instructions. Careful consideration and selection of the appropriate wall fixings according to the wall-mounted support is required to ensure the long life of your accessory. The use of stainless steel screws (Ø 4 mm) is highly recommended to prevent corrosion in damp environment. Before drilling, physically hold the product against the wall at desired position and mark the hole locations. All the fixing points must be respected. After installation and before use, make sure that all fixing screws are tightened securely. DO NOT use the grab bar as a step. DO NOT sit on or hang from the grab bar.

Fiche produit mise à jour le : 10/01/2024