



Technische fiche




Informaties

Aanstelling	Vasthoudbeugel hoek 2 wanden
Referentie	046640

De pluspunten

- + Make stepping into or out of the shower easier.
- + Possible to fit it "to the right" or "to the left".
- +
- + With slider bracket shower handset.
- + Concealed fixings.
- + Anticorrosion warranty.

Beschrijving

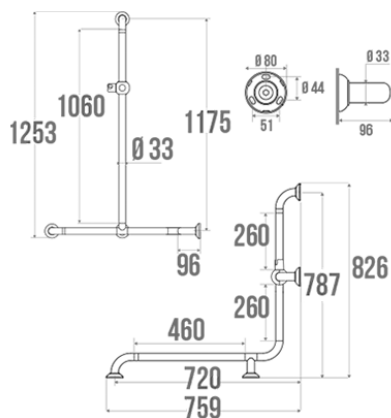

Composite material: White synthetic resin + aluminium profile. Tube Ø 33 mm.
With shower rail slider bracket.
90° angled.
White flange border and central body.
Concealed fixings.
Screws included
Delivered unassembled.

Technische kenmerken

Kleur	Wit
Afmetingen	1253 x 826 x 759 mm
Diameter Ø	33 mm
Materiaal	Polyamide (Nylon)
Brutogewicht	3.600 kg
Verpakking	Neutrale doos

Aanvaardbare last	150 kg
Getest in laboratorium aan	225 kg
Franse productie	ja
Onderhoud	ja
Waarborg	10 jaar
Nettogewicht	2.800 kg
Gencod	3563390466407
Douanecode	7615200000
Infoblad	S00001190_IND_08
Wissel stukken	Ref. 046100, Polyalu cover plate.##Ref. 046101, Bag of 3 stainless steel screws.##Ref. 046288, Flange, cover plate and fixings.

Ondehoud en installatie gids

Recommended height for the horizontal part : 800 mm from the ground. Grab bars provide support and added safety if properly fitted in accordance with our technical instructions. Careful consideration and selection of the appropriate wall fixings according to the wall-mounted support is required to ensure the long life of your accessory. The use of stainless steel screws (Ø 4 mm) is highly recommended to prevent corrosion in damp environment. Before drilling, physically hold the product against the wall at desired position and mark the hole locations. All the fixing points must be respected. After installation and before use, make sure that all fixing screws are tightened securely. DO NOT use the grab bar as a step. DO NOT sit on or hang from the grab bar.

Fiche produit mise à jour le : 07/05/2024