

Product data sheet



Information


Designation ARSIS straight grab bar, 400 mm, Bright Anodized Aluminium
Reference 049641



Product advantages

- + Elliptic tube for an improved grip.
- + Elegant and design shape.
- + Corrosion resistant warranty.

Description

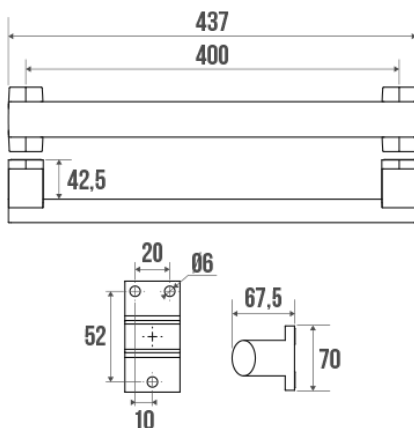

Elliptical tube in bright chrome-plated aluminium 38 x 25 mm.
Chrome-plated resin flanges.

Wall fixings included.
Design coordinated with all ARSIS items.
Perfectly suitable for use in the hospitality industry.

Technical characteristics

| | |
|------------------------|---|
| Finish | Anodized |
| Dimensions | 400 mm |
| Diameter Ø | 38 x 25 mm |
| Material | Aluminum |
| Gross weight | 0.500 kg |
| Packaging | Plastic protection bag + Hanger for display |
| CE Marking : safe load | 150 kg |
| Laboratory tests | 225 kg |
| Made in France | yes |
| Maintenance | yes |

| | |
|-----------------|---|
| Guarantee | 10 years |
| Net weight | 0.445 kg |
| Gencod | 3563390496411 |
| Custom code | 7615200000 |
| Technical sheet | A04984002_IND_11 |
| Spare parts | Réf. 049006 : Cache-fixation chromé, Réf. 049007 : Support de fixation alu chromé |

Fixing and maintenance advices

Recommended height for the horizontal part : 800 mm from the ground. Grab bars provide support and added safety if properly fitted in accordance with our technical instructions. Careful consideration and selection of the appropriate wall fixings according to the wall-mounted support is required to ensure the long life of your accessory. The use of stainless steel screws (Ø 4 mm) is highly recommended to prevent corrosion in damp environment. Before drilling, physically hold the product against the wall at desired position and mark the hole locations. All the fixing points must be respected. After installation and before use, make sure that all fixing screws are tightened securely. DO NOT use the grab bar as a step. DO NOT sit on or hang from the grab bar.

Fiche produit mise à jour le : 10/01/2024